




OptoTech

# ASP 80 Twin-A

Fully Automated High Speed Polisher

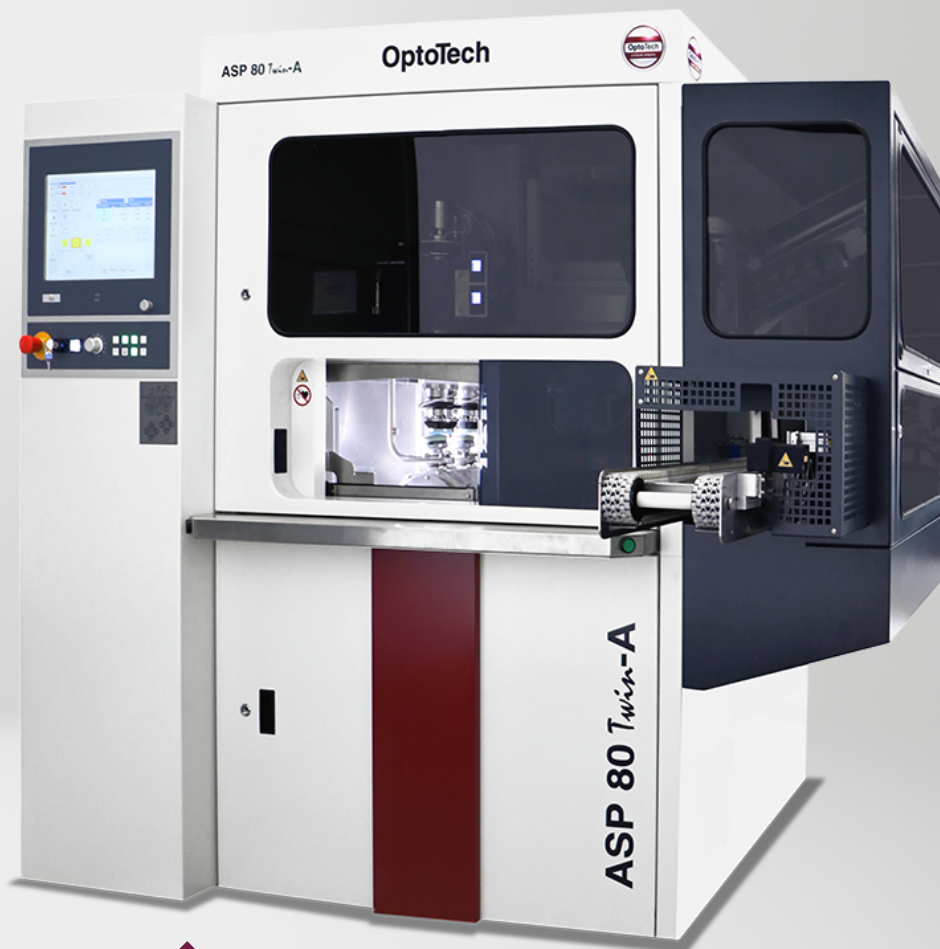


The OptoTech Digital-Surfacing-Polisher ASP 80 Twin-A is designed for full automatic high speed polishing of two toric/atoric or backside progressive lenses simultaneously. Round, oval, or lenses of any other shape can be polished.



## Technical data

	ASP 80 Twin-A
Application	Automated Freeform Polisher
Lens Diameter	40 mm - 85 mm
Optional Extended Range for Polishing	Lenticular lenses and radius up to -26 mm
Working Range Base Curve cv	up to -13 dpt. (Index 1.600)
Working Range Base Curve cx	up to 10 dpt. (Index 1.600)
Working Range Cylinder	Up to 6 dpt.
Control	Beckhoff
Lens Material	All organic Materials
Productivity	100 lenses/h; (depending on material, diameter etc.)
Spindles	2x Lens Spindle; 1x Revolving Tool Spindle
Tools	Hybrid Polishing Technology (HPT)
Air Pressure Requirement	6 bar
Power Requirement (others on request)	11 kW / 400 V / 50 Hz
Dimensions	Width: 2030 mm, Height: 2030 mm, Depth: 1860 mm
Weight (approx.)	1400 kg
Disclaimer	All data are subject to change without notice. Please verify details with OptoTech.

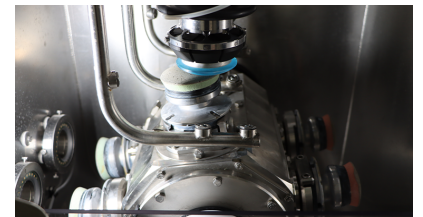



## Highlights

- Twin revolving tool spindles, each equipped with 2 pre-polishing tools and 2 fine polishing tools with different radii and diameter, which adapt themselves to the topography of the lens surface to provide the widest working range without compromising speed and quality
- New processing technology to bring down process times and increase tool lifetime of our Hybrid Polishing Technology (HPT) tools while producing high value products
- „Quick change“ tool concept with stainless steel magnetic holders for improved process stability and reduction in wear parts
- Image recognition system for tool inspection
- Integrated, fully automatic cleaning station
- Optimized handling for uninterrupted polishing and highest throughput

## System advantages

- Fully automatic polishing process
- Low operating costs thanks to the long life time of the HPT polishing tools
- All materials can be processed with the same tools
- High process reliability
- Consistent, reproducible surface quality
- High output for toric and digital surfaces

## Options

- Extended range option available for automatic polishing of Lenticular lenses and radius up to -26mm on request